



INFO

Supplied frames:	White (1) —Black (1)
Alternative frame (not supplied)	Vimar Idea ; Vimar Idea Rondò
CABLE LENGHT (Controller):	1,5 mt (6 x 2,5)
DEGREE OF PROTECTION:	IP44
NORMS:	EN 10133—EN 55032—EN 55024



SINGLE BUTTON VERSION

This control panel causes the toilet to flush automatically, leaving a certain amount of water in the bowl.



DOUBLE BUTTON VERSION

The toilet activated by two button control panel leaves the bowl completely empty when not in use. The "Before Use" button must be pressed to fill the bowl ready for use.

INTEGRATED TANK LEVEL INDICATORS

STANDARD Wall Switch has a Level indicator, to check the status of the black water tank. To operate, a dedicated sensors must be connected



**GREEN LIGHT
POWER ON
TANK LEVEL: LOW**

**RED LIGHT
TANK FULL**

INSTALLATION

STANDARD WALL SWITCH:

- Fix with the supplied screws in a hidden place (**possibly, guarantee the ease of access for maintenance**)
- Connect the plugs (see diagram)


SET THE WATER LEVEL

RECOMMENDED WATER AMOUNT (LEVEL) IS ABT. 1CM ABOVE THE TOILET'S DRAINAGE HOLE AT THE END OF "BEFORE USE" FUNCTION (DOUBLE BUTTON VERSION) OR WHILE UNATTENDED (SINGLE BUTTON / FAMILY VERSION).


TUNE THE KNOB AT THE BACK OF THE PANEL TO REDUCE OR EXTEND THE TIMING FOR WATER INLET



CONNECTIONS (SIMPLIFIED)

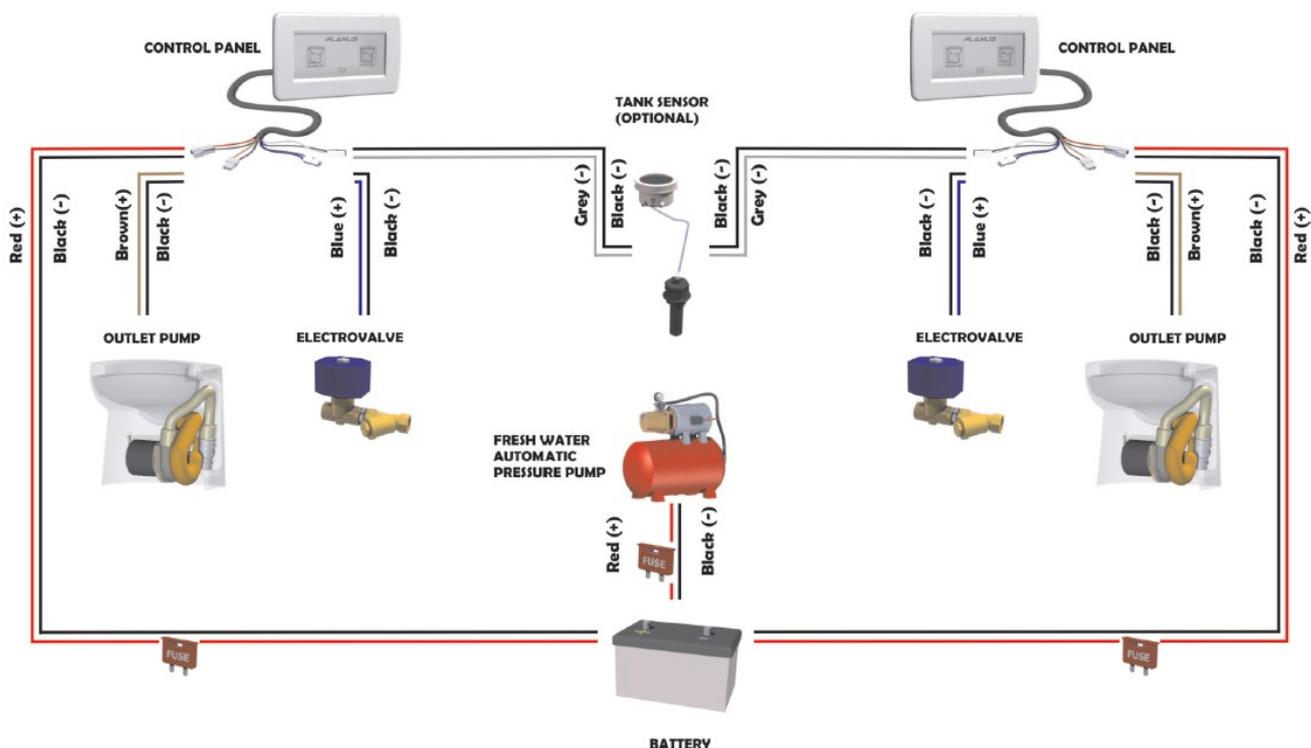


12/24Vdc DIAGRAM

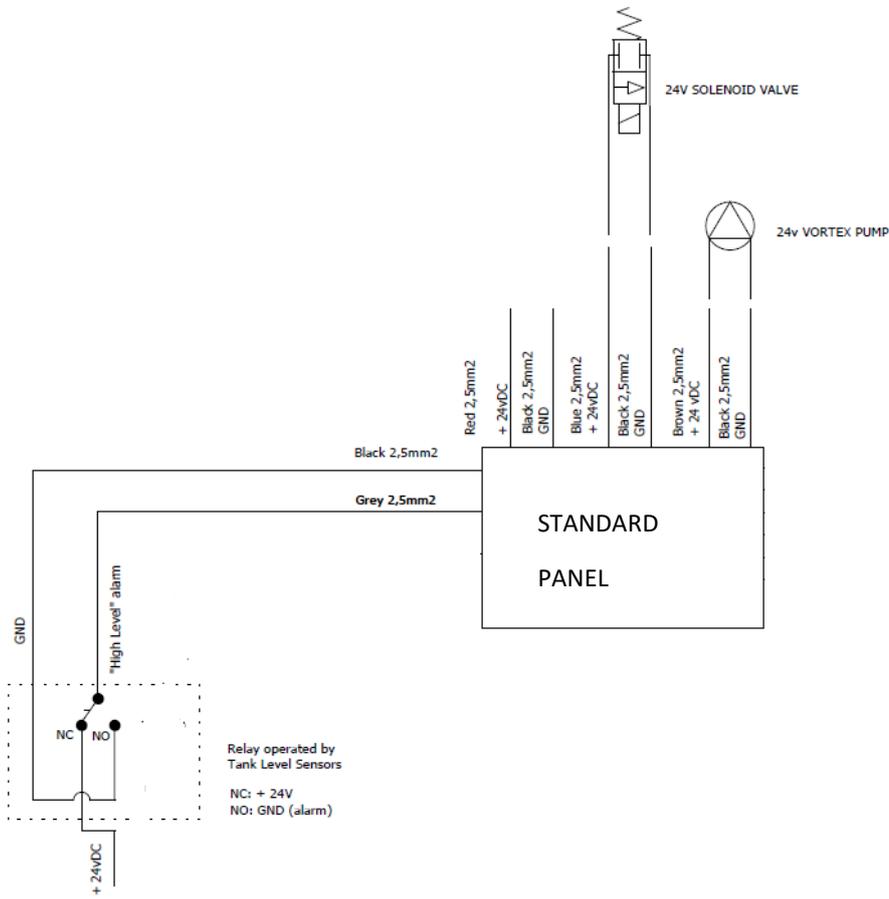



230Vac DIAGRAM

NOTE: for 230Vac systems an additional TRANSFORM BOX item (PW.030.00) is supplied with toilets.

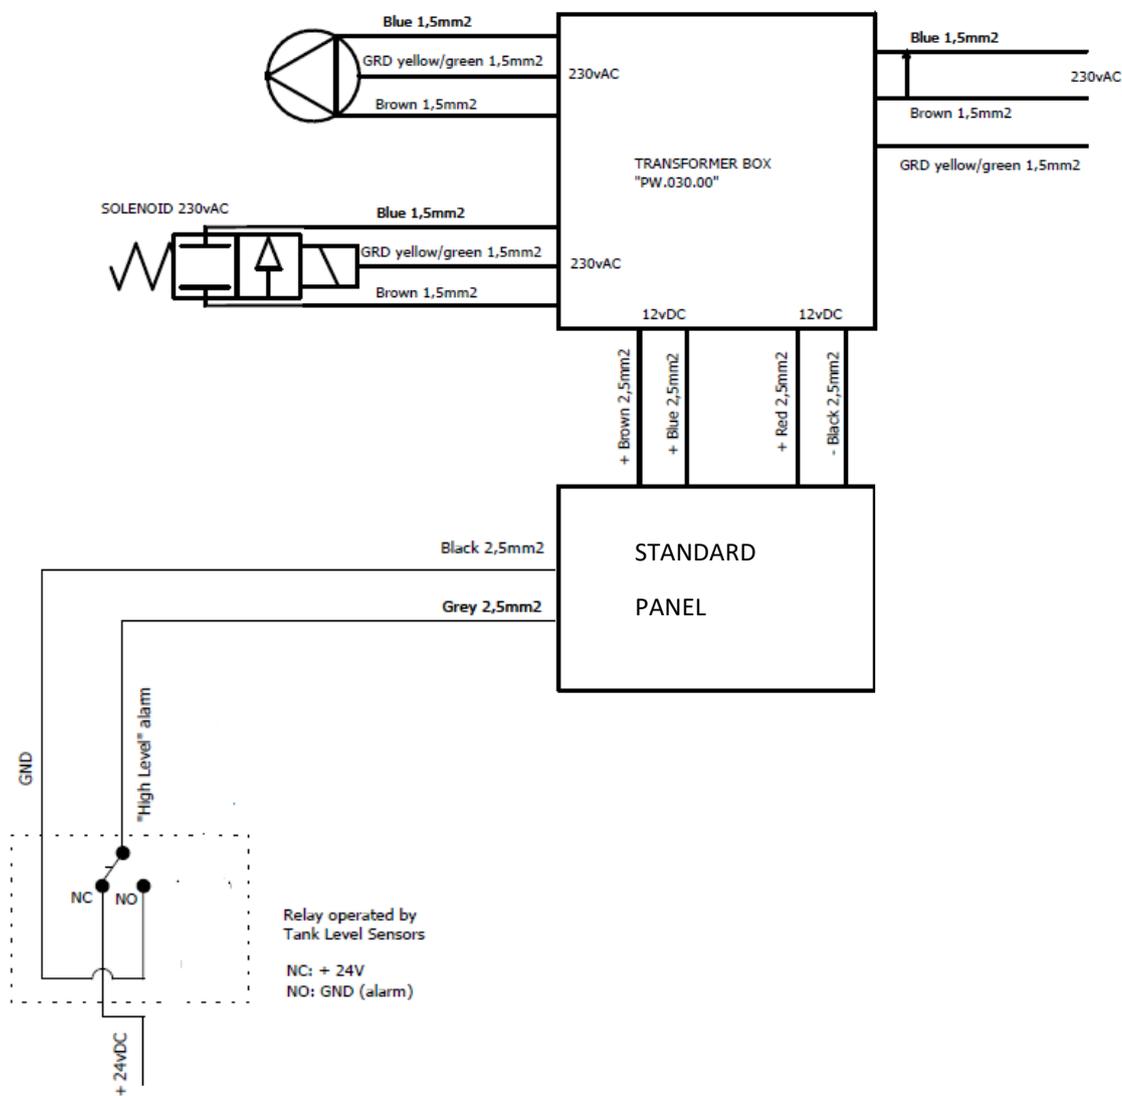



DIMENSIONS

STANDARD Wall Switch

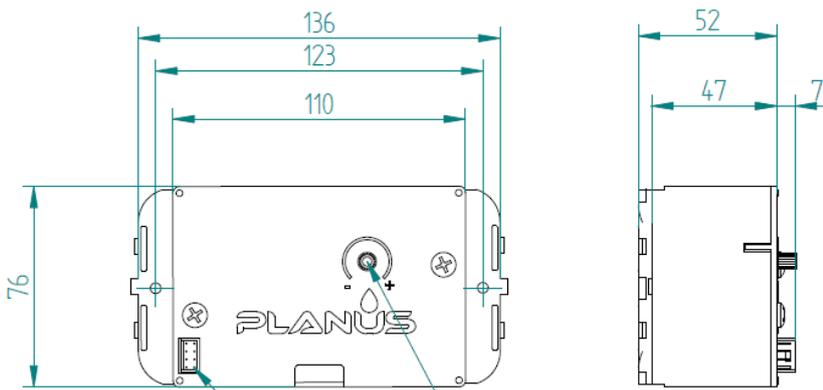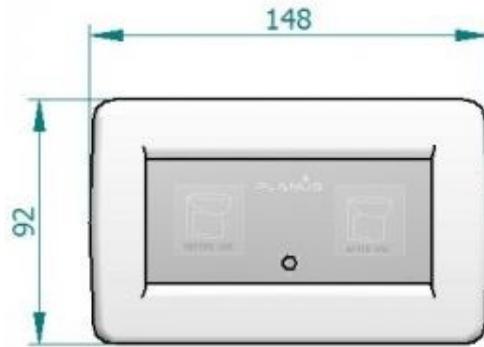

To TOUCH or SLIM wall switch

KNOB to set water level

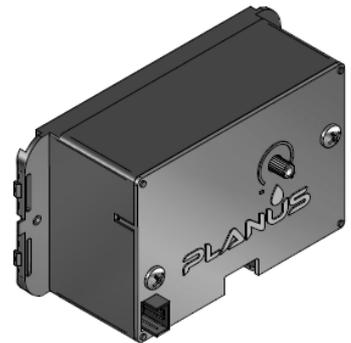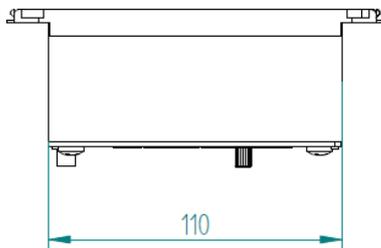

www.planus.eu

